Obtaining a permit for a Best Barns shed or garage kit

*Do-it-Yourself kits from Best Barns are designed for use as storage buildings or garages only. Use for any other purposes is neither implied nor inferred.**

Building code offices and HOA's may require additional documents to obtain a permit. The homeowner's first step is to contact their local code office and ask what is needed for the size of building to be purchased.

Typically, the necessary documentation may include some or all of the following.


- o Elevations showing at least two sides of structure.
- o Site plan showing existing structures and proposed build site.
- o Engineered drawings for truss system indicating snow and wind load ratings.**
- o Cross sections of wall framing and foundation.
- o Tie down locations for high wind load areas.***

Permit requirements vary based on location. Some areas may not require a permit at all. The documents provided by Best Barns are intended to help the homeowner with the permit process but do not guarantee a permit will be issued. It is the homeowner's responsibility to determine if a permit is required and submit the necessary documentation.

*Any alteration to the construction of Best Barns sheds or garages may require the services of a civil engineer to meet local building codes. Best Barns cannot provide these additional services.

** Engineered truss drawings stamped for your individual state can be obtained upon request. Some models do not have wind and snow load ratings. A non refundable fee will be required to purchase stamped drawings. Contact us directly at 800-245-1577 for further details.

*** Certain states such as Florida and California have stringent requirements for obtaining a permit. Depending on your location, a civil engineer's services may be required to provide necessary documents. These services are the homeowner's responsibility to obtain from an engineer within the state of build location and are not included in the purchase of a shed or garage kit.

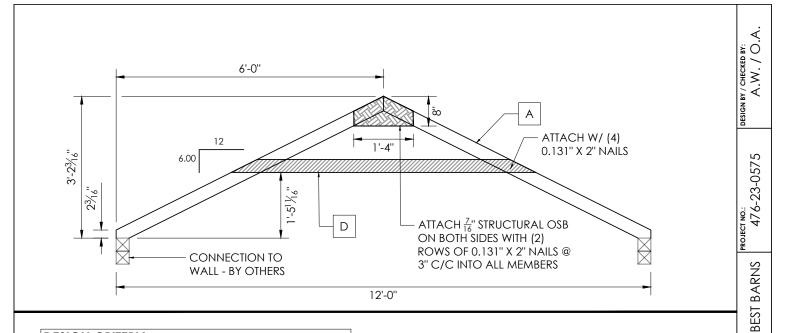

DESIGN CRITERIA

INTERNATIONAL BUILDING CODE IBC 2021, IBC 2018, IBC 2015 DESIGN CRITERIA :		
DEAD LOAD (D):		
ROOF COLLATERAL DEAD LOAD		2.5 PSF
LIVE LOAD (Lr):		
ROOF LIVE LOAD		20 PSF
SNOW LOAD (S):		
GROUND SNOW LOAD SNOW LOAD IMPORTANCE FACTOR (Is) EXPOSURE FACTOR (Ce) THERMAL FACTOR (Ct) GOVERNING ROOF SNOW LOAD		50 PSF 1.0 1.2 42 PSF
UNBALANCED SNOW LOAD		50 PSF
WIND (W):		
ANALYSIS PROCEDURE: BASIC WIND SPEED: EXPOSURE CATEGORY:	ASCE	7-10 / ASCE 7-16 150 MPH C
LOAD COMBINATIONS:		
1.0 D 1.0 D + 1.0 L 1.0 D + 1.0 (Lr or S) 1.0 D + 0.75 L + 0.75 (Lr or S) 1.0 D + (0.6 W) 1.0 D + 0.75 (1.0 W) + 0.75 L + 0.75 (Lr or S) 0.6 D + 1.0 W		

DESIGN DETAILS	
A - TOP CHORD	2X4
B - BOTTOM CHORD	-
C - WEB	-
D - COLLAR-TIE	2X4
SPACING	24'' C/C
WOOD MATERIAL	SPF NO. 2
MAX. UNBRACED LENGTH OF TOP CHORD	5'-1 <u>5</u> "
DEAD LOAD DEFLECTION	L/180
LIVE LOAD DEFLECTION	L / 240
DEAD + LIVE LOAD DEFLECTION	L/180
UPLIFT REACTION AT CONN. TO WALL (LBF)	160
LATERAL REACTION AT CONN. TO WALL (LBF)	829
BEARING REACTION AT CONN. TO WALL (LBF)	561
WOOD DESIGN NOTES:	
$C_{\rm D}$ - LOAD DURATION FACTOR FOR WIND	1.6
C _D - LOAD DURATION FACTOR FOR SNOW	1.15
C _M - MOISTURE CONTENT	1.0
Ct - TEMPERTATURE FACTOR	1.0

CLIENT:

TIMBER TRUSS

TITLE:

state: XX - XXXXXXXXXXX

01/24/2024

DATE:

NOTES:

1. UNBALANCED SNOW LOADS HAVE BEEN CONSIDERED IN THE DESIGN.

2. WIND LOADING IS BASED ON 3-S GUST ULTIMATE WIND SPEED, EXPOSURE C, PER ASCE 7.

3. LOADS ARE BASED ON RISK CATEGORY II.


4. SEE ADDITIONAL SHEETS FOR MEMBER CHECKS.

XX/XX/XXXX
XX/XX/XXXX
XX/XX/XXXX



Before you order our kit or begin construction, obtain a building permit. If additional documents are required contact questions@barnkits.com.

GREENBRIAR ELEVATION

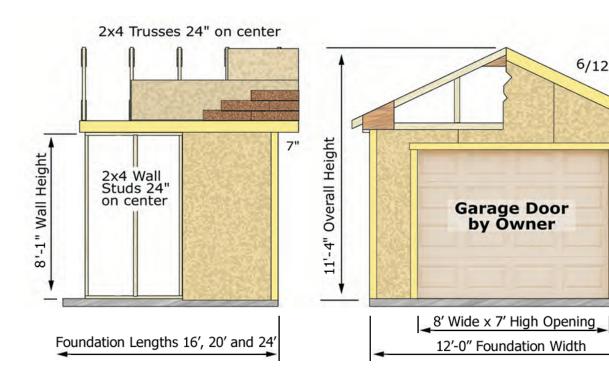

Foundation: Sold optionally

Wall Framing: 2x4 Construction with 24" on center stud spacing, single bottom plate and top plate with 2x4 tie plates.

Siding: 7/16" OSB (Oriented Strand Board) underlay. Exterior siding like Vinyl, ship lap, stucco, etc by owner.



Roof System: 2x4 trusses spaced 24" on center, (see engineered truss drawing for load ratings). 7/16" OSB roof sheathing. *Shingles by owner*.

6/12 pitch

Exterior Trim: White pine trim for door, gable trim and front and back fascia. Primed ready to paint.

Garage Door: By owner.

Hardware: Nails for framing, metal hurricane hangers for trusses.


Optional Sturdy-built Floor System:

2x4 treated floor joist spaced 12" on center covered with 3/4" plywood, *not treated*, installed over 4x4 treated runners. Galvanized door sill and nails are included. Material is not pre-cut.

* 12'x16' Foundation Size	12'-0" x 16'-0"
12'x20' Foundation Size	12'-0" x 20'-0"
12'x24' Foundation Size	12'-0" x 24'-0"

a division of RBS Holdings, Inc. 205 Arlington Drive, Greenville, PA 16125

Best Barns model: **Concrete Slab** Wood Floor _ft. wide x ____ft. long 2x4 Studs 24" o.c. 7/16 OSB Underlay Manufactured by: 7/16 OSB Underlay **RBS** Holdings, Inc. 2x4 Studs 24" o.c. 205 Arlington Drive Greenville, PA 16125 2x4 PT Plate phone: 800-245-1577 __ ga Wire Mesh fax: 724-646-0772 " Thick Cement -2x4 PT Plate **Common Foundation** 2x4 PT Joist Header **Cross Sections** Depth 3/4" Plywood This document illustrates common " Deep Gravel foundation types which can be a contract the second used for construction of Best Barns 2x4 PT Joists 16" o.c. __ ga Rebar 12 ft. wide structures. Alteration 4x4 PT Timber may be necessary to conform to homeowners intended use and or permitting requirements. **Homeowner Design** Drawings not to scale. **Instructions:** Check appropriate foundation cross section and provide specifications as necessary. Homeowner may also design and draw in space provided for custom foundation type.

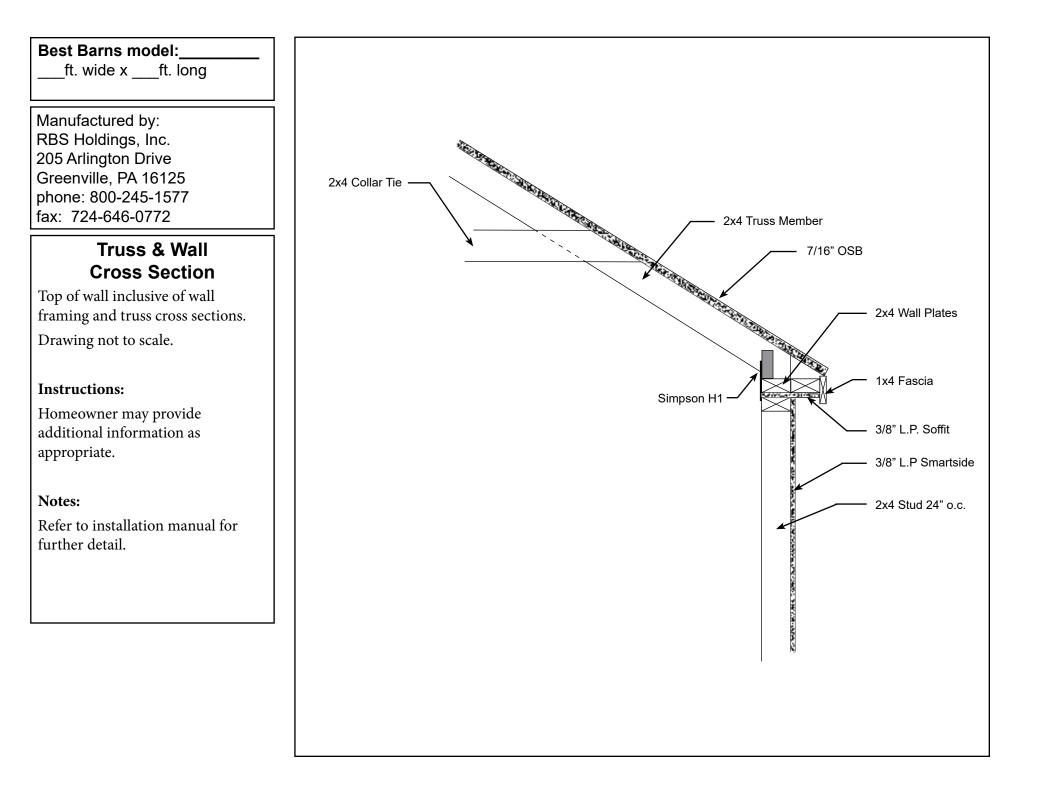

Site Plan for:

Manufactured by: RBS Holdings, Inc. 205 Arlington Drive Greenville, PA 16125 phone: 800-245-1577 fax: 724-646-0772

Instructions:

Draw property line, existing structures and proposed placement of building.

Homeowner may also be required to show trees and shubs. Check with HOA or permit office for requirements.